


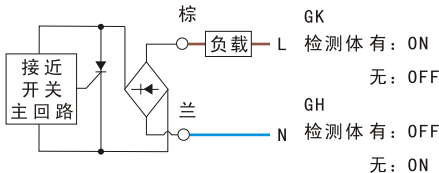
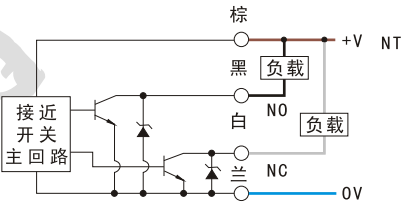
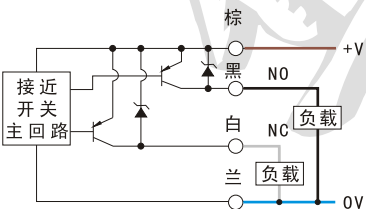

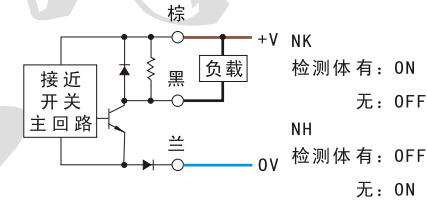


规格型号

| 外型代码                                                                                                           | 安装方式 | 感应距离      | 工作电压         | 输出状态      | 型号(常开)    | 型号(常闭)    | 引线方式 |   |   |
|----------------------------------------------------------------------------------------------------------------|------|-----------|--------------|-----------|-----------|-----------|------|---|---|
| <div></div> <div>尺寸图：mm</div> | 齐平式  | 20mm      | 10-30VDC     | NPN三线     | HJE42-1NK | HJE42-1NH | 2M   |   |   |
|                                                                                                                |      |           |              | NPN四线开+闭  | HJE42-1NT |           | 2M   |   |   |
|                                                                                                                |      |           |              | PNP三线     | HJE42-1PK | HJE42-1PH | 2M   |   |   |
|                                                                                                                |      |           |              | PNP四线开+闭  | HJE42-1PT |           | 2M   |   |   |
|                                                                                                                |      |           |              | 二线        | HJE42-1DK | HJE42-1DH | 2M   |   |   |
|                                                                                                                |      |           |              | 二线开闭可选    | HJE42-1DC |           | 2M   |   |   |
|                                                                                                                |      |           | 24VDC        |           | 继电器触点输出   | -         |      | - |   |
|                                                                                                                | 非齐平式 | 30mm      | 10-30VDC     | NPN三线     | HJE42-2NK | HJE42-2NH | 2M   |   |   |
|                                                                                                                |      |           |              | NPN四线开+闭  | HJE42-2NT |           | 2M   |   |   |
|                                                                                                                |      |           |              | PNP三线     | HJE42-2PK | HJE42-2PH | 2M   |   |   |
|                                                                                                                |      |           |              | PNP四线开+闭  | HJE42-2PT |           | 2M   |   |   |
|                                                                                                                |      |           |              | 二线        | HJE42-2DK | HJE42-2DH | 2M   |   |   |
|                                                                                                                |      |           |              | 二线开闭可选    | HJE42-2DC |           | 2M   |   |   |
|                                                                                                                |      |           |              | 24VDC     |           | 继电器触点输出   | -    |   | - |
|                                                                                                                |      | 40mm      | 10-30VDC     | NPN三线     | HJE42-3NK | HJE42-3NH | 2M   |   |   |
|                                                                                                                |      |           |              | NPN四线开+闭  | HJE42-3NT |           | 2M   |   |   |
|                                                                                                                |      |           |              | PNP三线     | HJE42-3PK | HJE42-3PH | 2M   |   |   |
|                                                                                                                |      |           |              | PNP四线开+闭  | HJE42-3PT |           | 2M   |   |   |
|                                                                                                                |      |           |              | 二线        | HJE42-3DK | HJE42-3DH | 2M   |   |   |
| 二线开闭可选                                                                                                         |      |           |              | HJE42-3DC |           | 2M        |      |   |   |
|                                                                                                                |      |           | 24VDC        |           | 继电器触点输出   | -         |      | - |   |
| 齐平式                                                                                                            | 20mm | 90-250VAC | 二线           | HJE42-1GK | HJE42-1GH | 2M        |      |   |   |
|                                                                                                                |      | 220VAC    | 继电器触点输出      | -         |           | -         |      |   |   |
| 非齐平式                                                                                                           | 30mm | 90-250VAC | 二线           | HJE42-2GK | HJE42-2GH | 2M        |      |   |   |
|                                                                                                                |      | 220VAC    | 继电器触点输出      | -         |           | -         |      |   |   |
|                                                                                                                | 40mm | 90-250VAC | 二线           | HJE42-3GK | HJE42-3GH | 2M        |      |   |   |
|                                                                                                                |      | 220VAC    | 继电器触点输出      | -         |           | -         |      |   |   |
| 齐平式                                                                                                            | 20mm |           |              | -         | -         | -         |      |   |   |
| E42                                                                                                            | 非齐平式 | 30mm      | 20-250VAC/DC | 交、直流两用型   | -         | -         | -    |   |   |
|                                                                                                                |      | 40mm      |              |           | -         | -         | -    |   |   |

技术参数

| 型号        | 参数 | 工作电流   | 漏电流     | 开关频率  | 输出电压  | 回差 (mm)                                | 重复精度 (mm)                                  | 短路保护 | 环境温度    | 防护等级 | 壳体材质                         | 绝缘阻抗 (DC500V) | 击穿电压 |
|-----------|----|--------|---------|-------|-------|----------------------------------------|--------------------------------------------|------|---------|------|------------------------------|---------------|------|
| HJE42-□N□ |    | ≤200mA | ≤0.05mA | ≤50Hz | ≤1.5V | 约为感应距离的5%<br>1型: 1<br>2型: 1.5<br>3型: 2 | 约为回差的10%<br>1型: 0.1<br>2型: 0.15<br>3型: 0.2 | 有    | -25~70℃ | IP67 | 壳体: ABS<br>引线: 无氧铜丝<br>PVC护套 | -             | -    |
| HJE42-□P□ |    |        |         |       |       |                                        |                                            |      |         |      |                              |               |      |
| HJE42-□D□ |    | ≤50mA  | ≤0.4mA  | ≤25Hz | ≤6V   |                                        |                                            |      |         |      |                              |               |      |
| HJE42-□G□ |    | ≤300mA | ≤1.6mA  | ≤10Hz | ≤6.5V |                                        |                                            |      |         |      |                              |               |      |

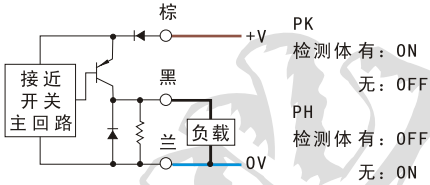

对浸水的防护



可水下1米, 历时30分钟  
而不受损害。

IP67