

洞头县华侨电器有限公司

Technical drawing of the LED module showing front and side views with dimensions:


- Front View (Left):**
 - Overall width: 25
 - Overall height: 56
 - Top mounting tab width: 18
 - Two mounting holes: $2 \times \phi 3$
 - LED chip location indicated by a label and leader line.
 - Bottom circular feature with concentric circles.
- Side View (Right):**
 - Overall width: 26
 - Overall height: 69
 - Top mounting tab width: 22
 - LED chip height from bottom: 22
 - Bottom flange height: 7

尺寸图: mm



实物图

型号 \ 参数	工作电流	漏电流	开关频率	输出压降	回差 (mm)	重复精度 (mm)	短路保护	环境温度	防护等级	壳体材质	绝缘阻抗 (DC500V)	击穿电压
HJH25-□N□	≤200mA	≤0.05mA	≤200Hz	≤1.5V	约为感应距离的5%	约为同差的10%	有	-25~70℃	IP67	壳体: ABS 引线: 无氧铜丝 PVC护套	-	-
HJH25-□P□					1型: 0.5	1型: 0.05						
HJH25-□D□	≤50mA	≤0.4mA	≤100Hz	≤6V	2型: 0.75	2型: 0.075						
HJH25-□G□	≤300mA	≤1.6mA	≤20Hz	≤6.5V	3型: 1	3型: 0.1						
HJH25-□T□	AC ≤300mA DC ≤100mA	≤1.6mA	≤20Hz	≤6.5V								

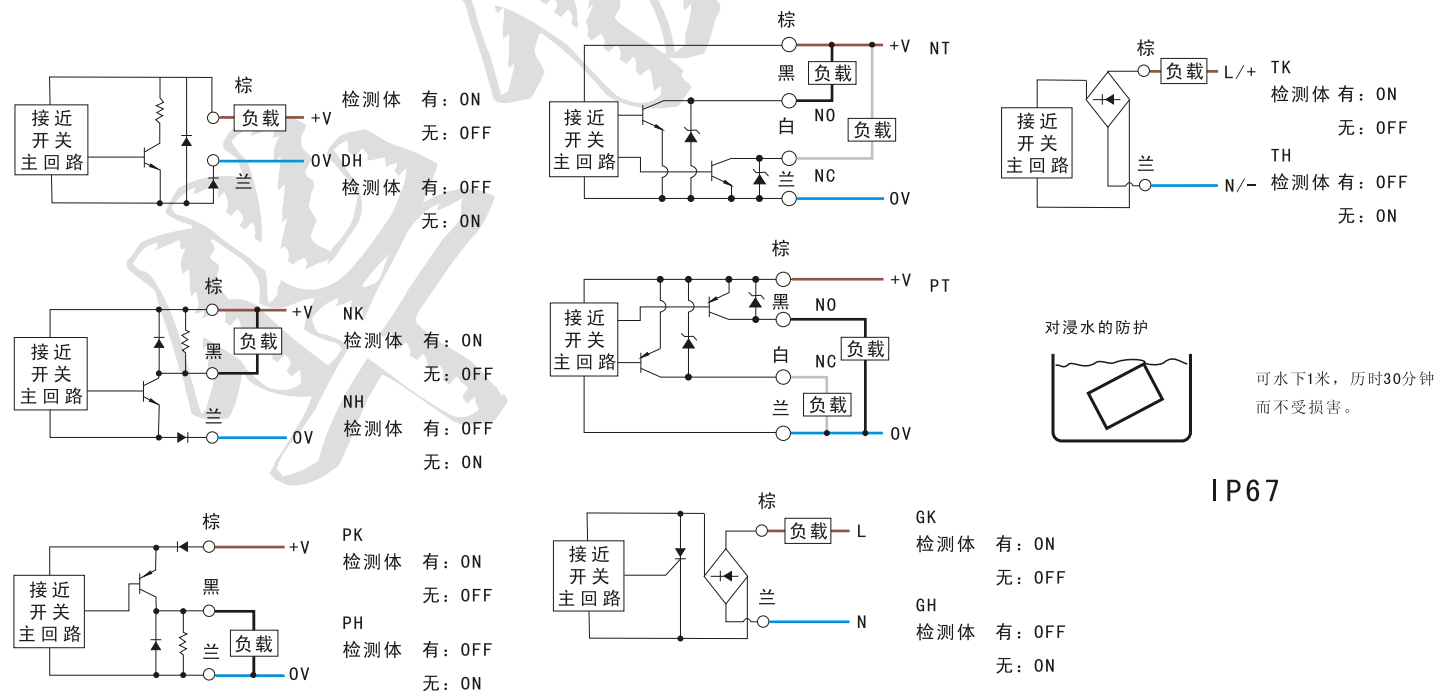

IP67