




额定感应距离/ 实际工作距离		埋入式
		非埋入式
单位:mm		

10mm/8mm
15mm/12mm

B41 Φ34×82

10...30VDC
50mA/200mA
100Hz/200Hz
6V/1.5V
<0.4mA/0.05mA
LJB41M-3010PK
LJB41M-3010PH
LJB41M-3010PT
LJB41M-3010NK
LJB41M-3010NH
LJB41M-3010NT
LJB41M-3010DK
LJB41M-3010DH
LJB41M-3010DC
LJB41M-3010DJ
LJB41-3015PK
LJB41-3015PH
LJB41-3015PT
LJB41-3015NK
LJB41-3015NH
LJB41-3015NT
LJB41-3015DK
LJB41-3015DH
LJB41-3015DC
LJB41-3015DJ
90...250VAC
300mA
25Hz
<6.5V
≤1.6mA
LJB41M-2410GK
LJB41M-2410GH
LJB41M-4010GK
LJB41M-4010GH
LJB41M-2410GJ
LJB41-2415GK
LJB41-2415GH
LJB41-4015GK
LJB41-4015GH
LJB41-2415GJ
检测距离(Sn)的5%
约为回差(H)的10%
-
-
Yes
-25℃...70℃
60×60×1t
ABS工程塑料
IP66

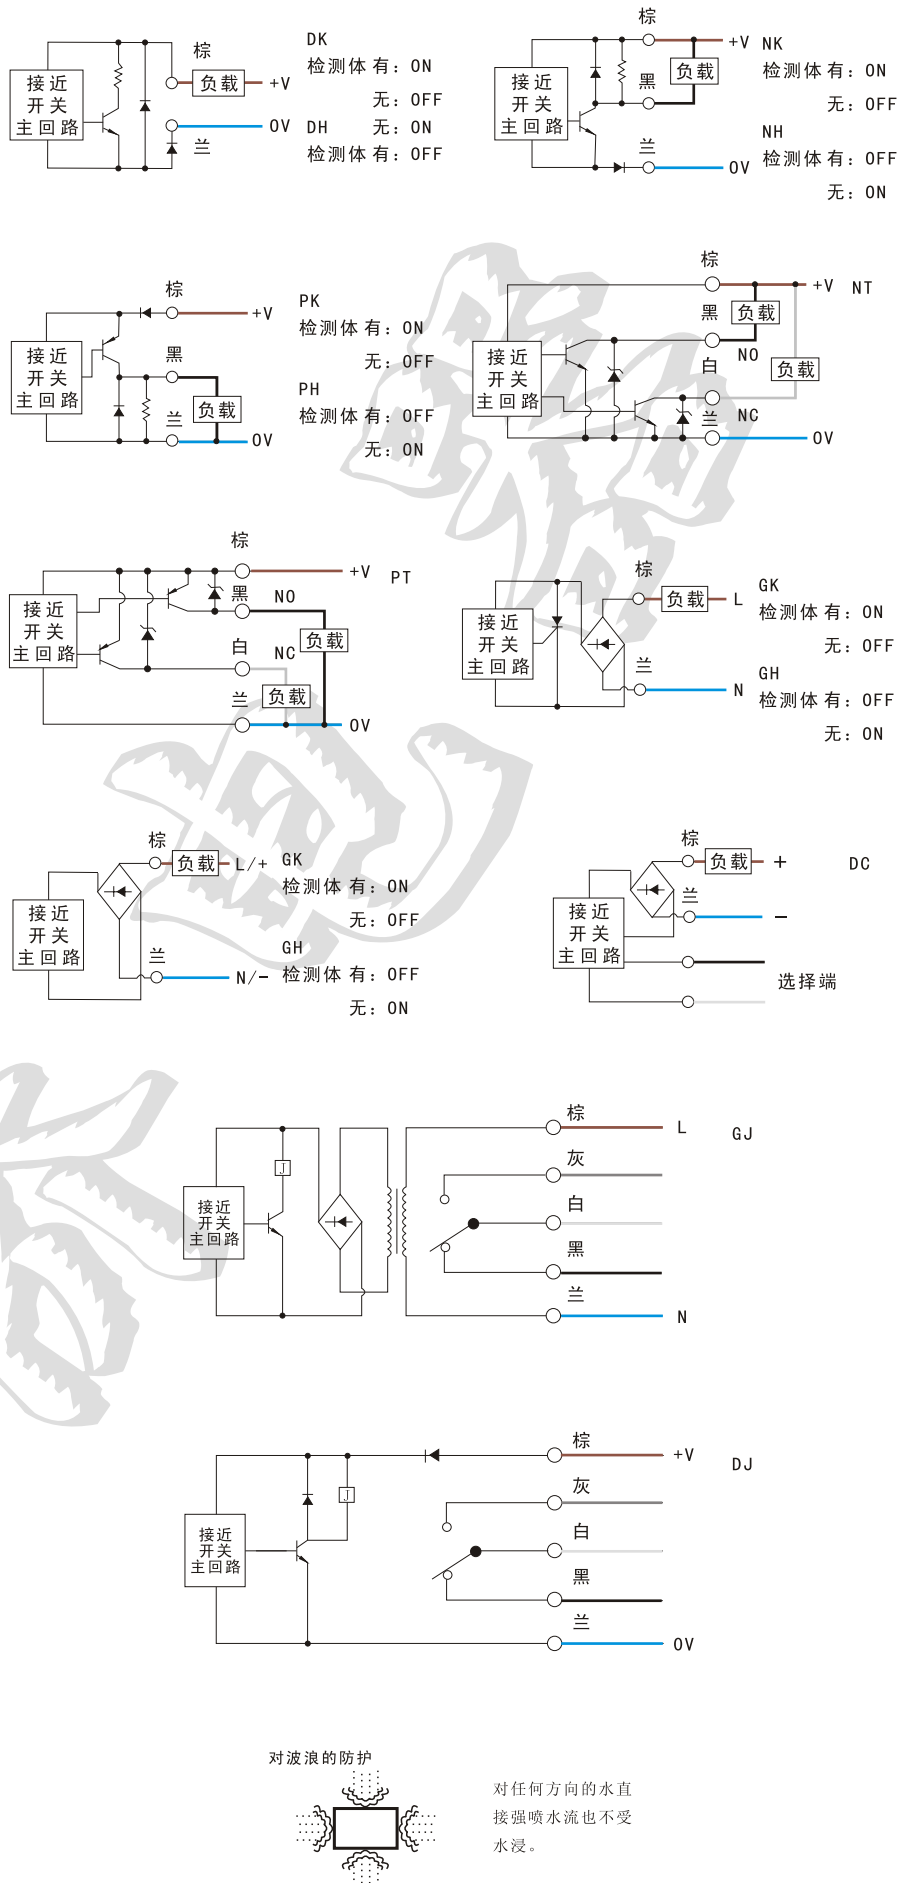

IP66