

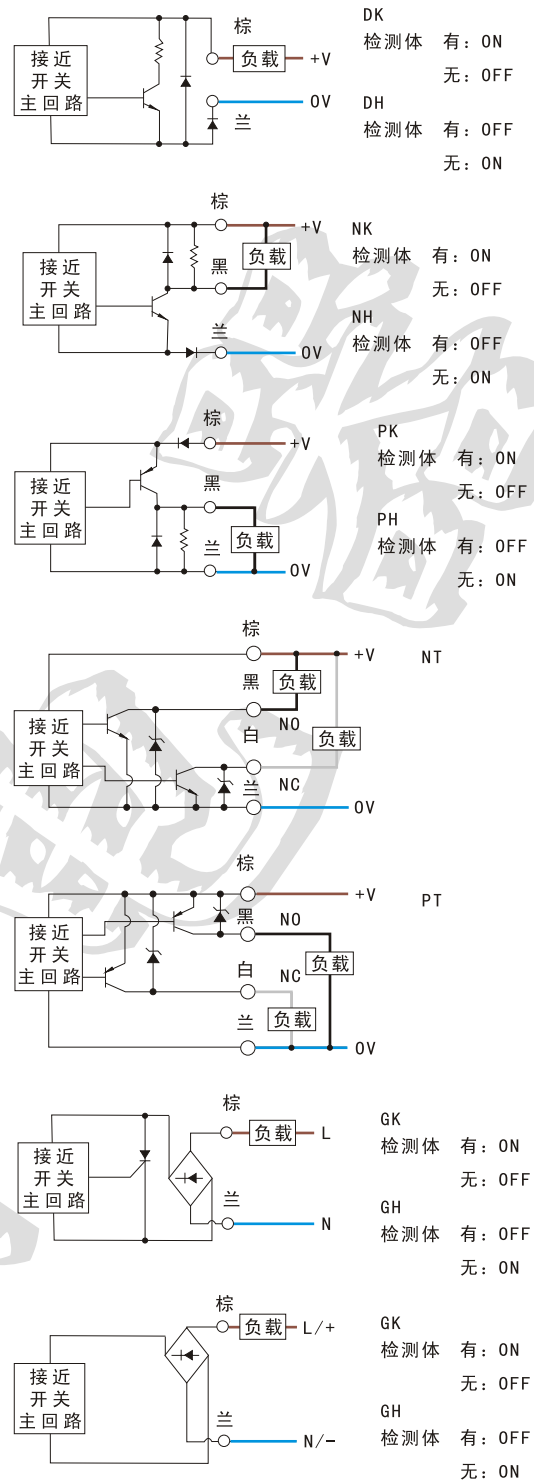


额定感应距离/ 实际工作距离		埋入式
		非埋入式
单位:mm		

7mm/5.6mm
10mm/8mm
 
B21 Φ20×76

10...30VDC
50mA/200mA
100Hz/200Hz
6V/1.5V
<0.4mA/0.05mA
LJB21M-3007PK
LJB21M-3007PH
LJB21M-3007PT
LJB21M-3007NK
LJB21M-3007NH
LJB21M-3007NT
LJB21M-3007DK
LJB21M-3007DH
LJB21-3010PK
LJB21-3010PH
LJB21-3010PT
LJB21-3010NK
LJB21-3010NH
LJB21-3010NT
LJB21-3010DK
LJB21-3010DH
90...250VAC
300mA
25Hz
<6.5V
≤1.6mA
LJB21M-2407GK
LJB21M-2407GH
LJB21M-4007GK
LJB21M-4007GH
LJB21-2410GK
LJB21-2410GH
LJB21-4010GK
LJB21-4010GH
检测距离(Sn)的5%
约为回差(H)的10%
-
-
Yes
-25℃...70℃
50×50×1t
ABS工程塑料
IP66



对波浪的防护



对任何方向的水直
接强喷水流也不受
水浸。

IP66