


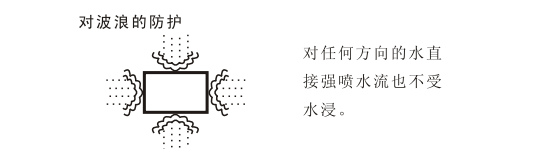
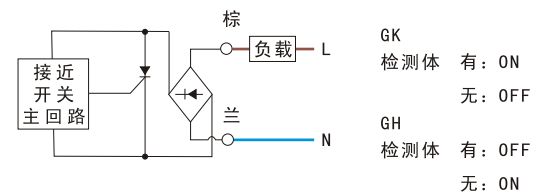
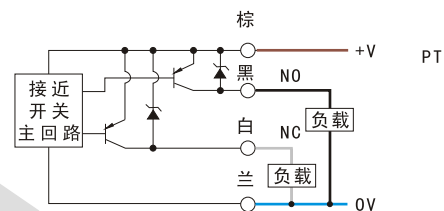
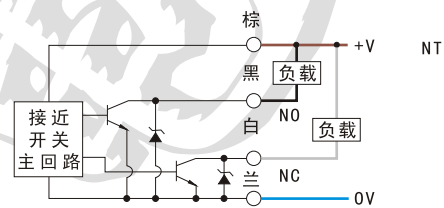
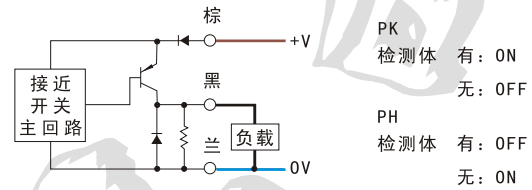
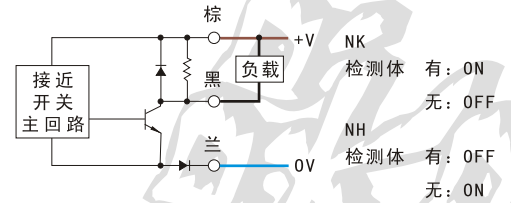


额定感应距离/ 实际工作距离		埋入式
		非埋入式
单位:mm		

2mm/1.6mm
4mm/3.2mm
 
B11 Φ10×72

10...30VDC
50mA/200mA
400Hz/800Hz
6V/1.5V
<0.4mA/0.05mA
LJB11M-3002PK
LJB11M-3002PH
LJB11M-3002PT
LJB11M-3002NK
LJB11M-3002NH
LJB11M-3002NT
LJB11M-3002DK
LJB11M-3002DH
LJB11-3004PK
LJB11-3004PH
LJB11-3004PT
LJB11-3004NK
LJB11-3004NH
LJB11-3004NT
LJB11-3004DK
LJB11-3004DH
90...250VAC
300mA
25Hz
<6.5V
≤1.6mA
LJB11M-2402GK
LJB11M-2402GH
LJB11-2404GK
LJB11-2404GH
检测距离(Sn)的5%
约为回差(H)的10%
>20MΩ(DC500V)
DC1500V/AC2000V
Yes
-25℃...70℃
30×30×1t
黄铜镀铬
IP66

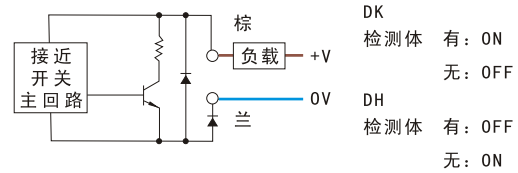

IP66