

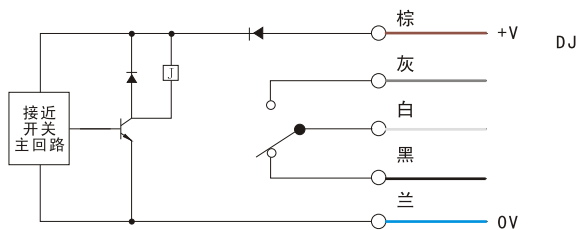
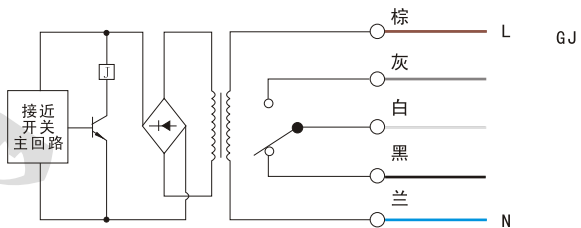



额定感应距离/ 实际工作距离		埋入式
		非埋入式
单位:mm		
</		

7mm/5.6mm
10mm/8mm

K42 42×75×35

10...30VDC
50mA/200mA
200Hz/400Hz
6V/1.5V
<0.4mA/0.05mA
LJK42M-3007PK
LJK42M-3007PH
LJK42M-3007PT
LJK42M-3007NK
LJK42M-3007NH
LJK42M-3007NT
LJK42M-3007DK
LJK42M-3007DH
LJK42M-3007DC
LJK42M-3007DJ
LJK42-3010PK
LJK42-3010PH
LJK42-3010PT
LJK42-3010NK
LJK42-3010NH
LJK42-3010NT
LJK42-3010DK
LJK42-3010DH
LJK42-3010DC
LJK42-3010DJ
90...250VAC
300mA
25Hz
<6.5V
≤1.6mA
LJK42M-2407GK
LJK42M-2407GH
LJK42M-4007GK
LJK42M-4007GH
LJK42M-4007GJ
LJK42-2410GK
LJK42-2410GH
LJK42-4010GK
LJK42-4010GH
LJK42-4010GJ
检测距离(Sn)的5%
约为回差(H)的10%
>20MΩ(DC500V)
DC1500V/AC2000V
Yes
-25℃...70℃
40×40×1t
铸铝
IP66

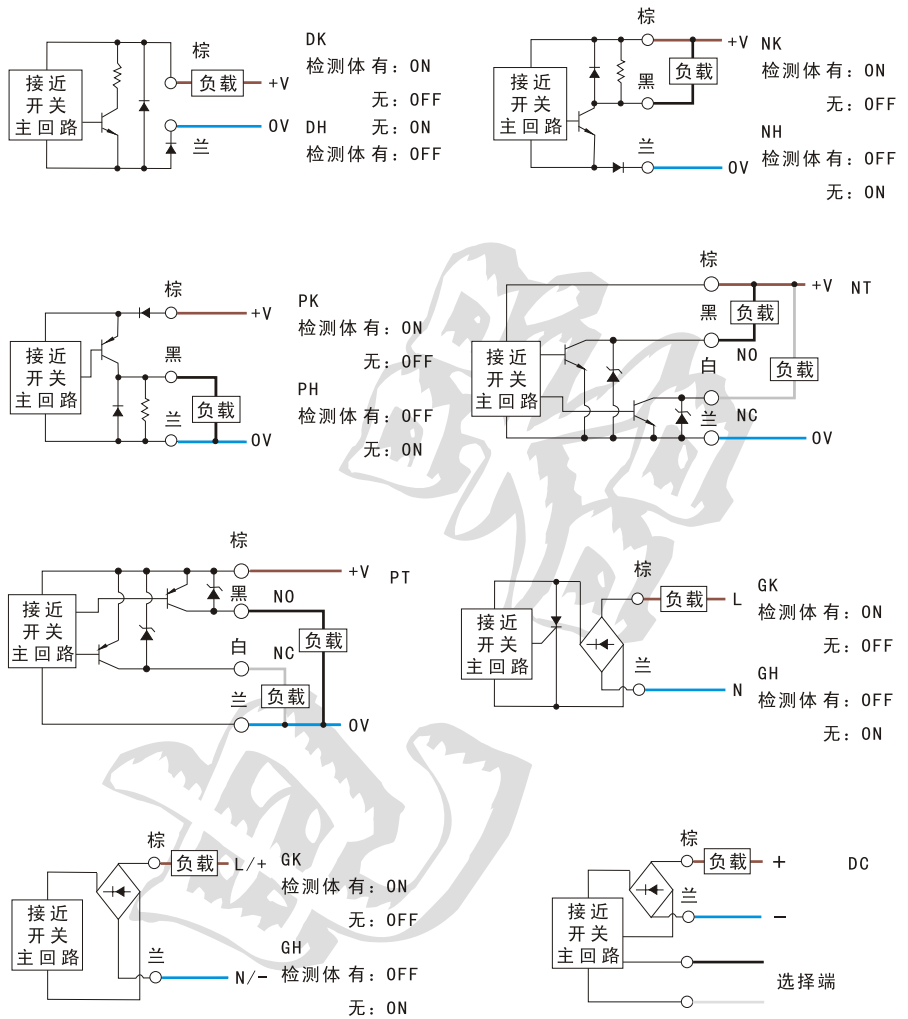

对波浪的防护



对任何方向的水直
接强喷水流也不受
水浸。

IP66