


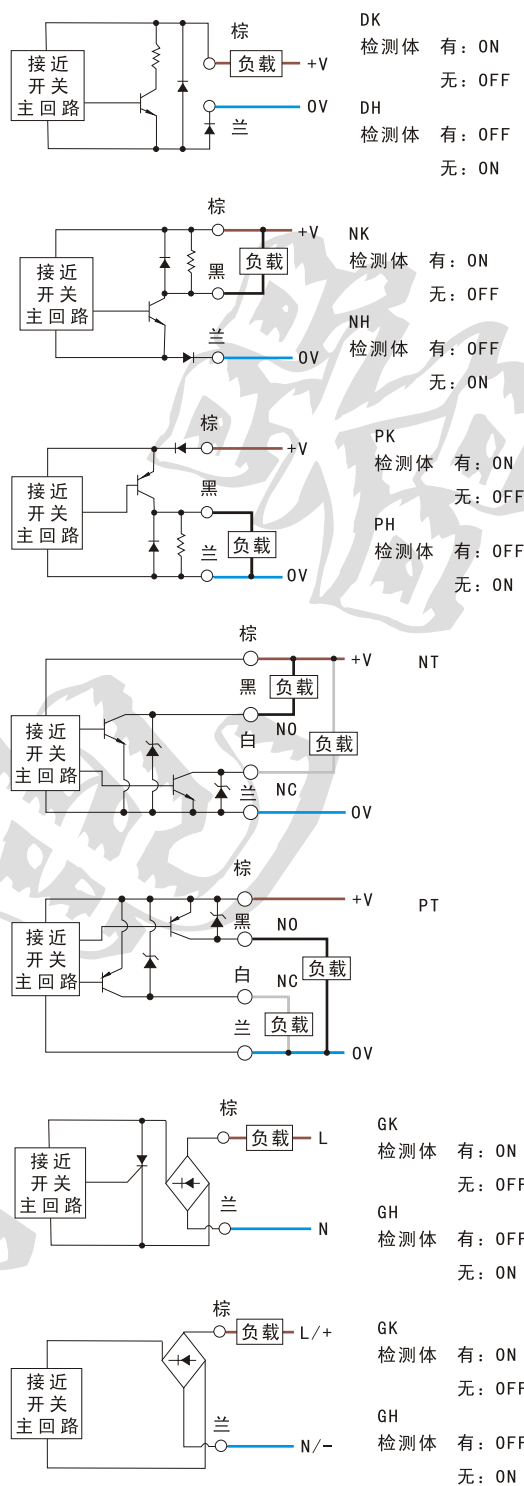


额定感应距离/ 实际工作距离		埋入式
		非埋入式
单位:mm		

15mm/12mm
20mm/16mm

K40 □40×52

10...30VDC
50mA/200mA
50Hz/100Hz
6V/1.5V
<0.4mA/0.05mA
LJK40M-3015PK
LJK40M-3015PH
LJK40M-3015PT
LJK40M-3015NK
LJK40M-3015NH
LJK40M-3015NT
LJK40M-3015DK
LJK40M-3015DH
LJK40-3020PK
LJK40-3020PH
LJK40-3020PT
LJK40-3020NK
LJK40-3020NH
LJK40-3020NT
LJK40-3020DK
LJK40-3020DH
90...250VAC
300mA
15Hz
<6.5V
≤1.6mA
LJK40M-2408GK
LJK40M-2408GH
LJK40M-4008GK
LJK40M-4008GH
LJK40-2408GK
LJK40-2408GH
LJK40-4008GK
LJK40-4008GH
检测距离(Sn)的5%
约为回差(H)的10%
-
-
Yes
-25℃...70℃
80×80×1t
ABS工程塑料
IP66



对波浪的防护



对任何方向的水直
接强喷水流也不受
水浸。

IP66