

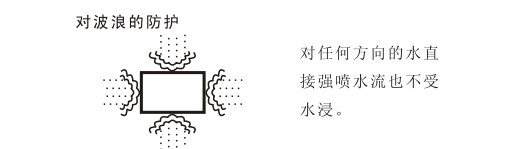
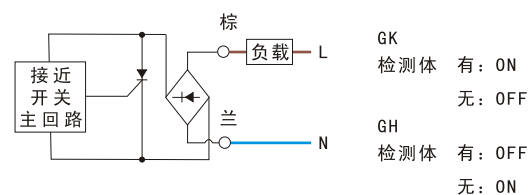
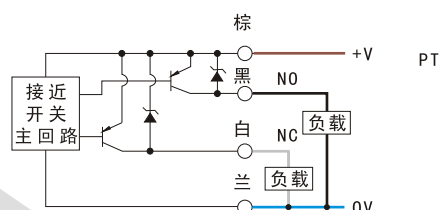
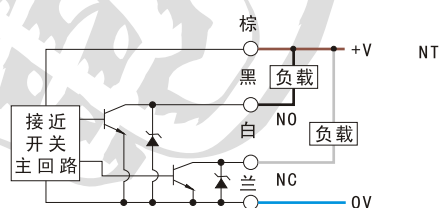
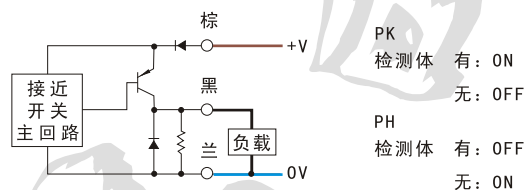
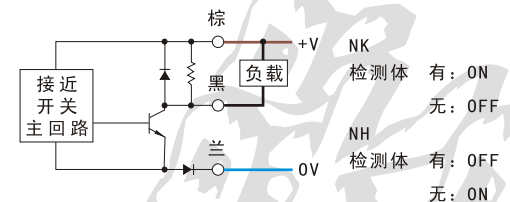



额定感应距离/ 实际工作距离		埋入式
		非埋入式
单位:mm		

2mm/1.6mm
4mm/3.2mm

A11 M12×65

10...30VDC
50mA/200mA
400Hz/800Hz
6V/1.5V
<0.4mA/0.05mA
LJA11M-3002PK
LJA11M-3002PH
LJA11M-3002PT
LJA11M-3002NK
LJA11M-3002NH
LJA11M-3002NT
LJA11M-3002DK
LJA11M-3002DH
LJA11-3004PK
LJA11-3004PH
LJA11-3004PT
LJA11-3004NK
LJA11-3004NH
LJA11-3004NT
LJA11-3004DK
LJA11-3004DH
90...250VAC
300mA
25Hz
<6.5V
≤1.6mA
LJA11M-2402GK
LJA11M-2402GH
LJA11-2404GK
LJA11-2404GH
检测距离(Sn)的5%
约为回差(H)的10%
>20MΩ(DC500V)
DC1500V/AC2000V
Yes
-25℃...70℃
30×30×1t
黄铜镀铬
IP66

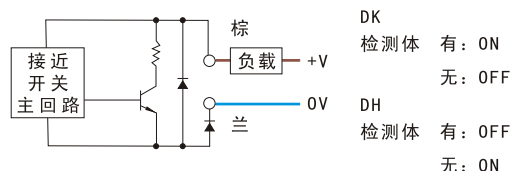

对波浪的防护



对任何方向的水直
接强喷水流也不受
水浸。

IP66