


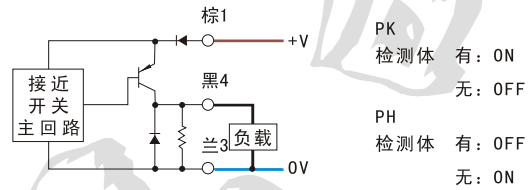
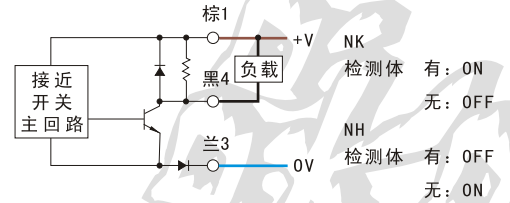


额定感应距离/ 实际工作距离		埋入式
		非埋入式
单位:mm		

1mm/0.8mm
2mm/1.6mm
CE  A01-G M8×70

10...30VDC
50mA/200mA
500Hz/1000Hz
6V/1.5V
<0.4mA/0.05mA
LJA01M-3001PK-G
LJA01M-3001PH-G
LJA01M-3001NK-G
LJA01M-3001NH-G
LJA01M-3001DK-G
LJA01M-3001DH-G
LJA01-3002PK-G
LJA01-3002PH-G
LJA01-3002NK-G
LJA01-3002NH-G
LJA01-3002DK-G
LJA01-3002DH-G
检测距离(Sn)的5% 约为回差(H)的10% >20MΩ(DC500V) DC1500V 三线Yes/二线No -25℃...70℃ 20×20×1t 黄铜镀铬 取决于接插件

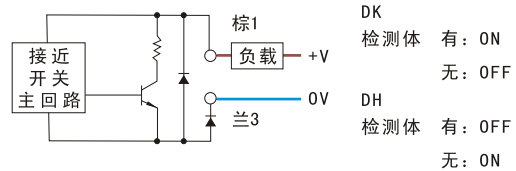

注: 定货请注明是弯头插还是直头插。