



额定感应距离/ 实际工作距离		埋入式	非埋入式
单位:mm			
</			

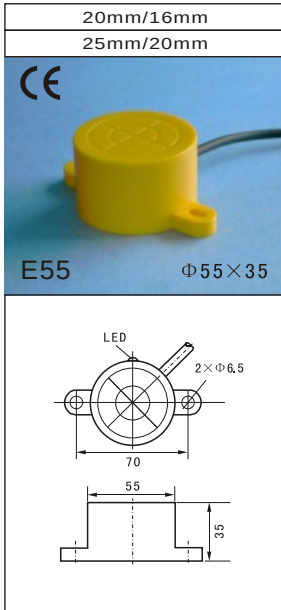


10...30VDC	50mA/200mA	40Hz/80Hz	6V/1.5V	<0.4mA/0.05mA
LJE55M-3020PK	LJE55M-3020PH	LJE55M-3020PT	LJE55M-3020NK	LJE55M-3020NH
LJE55M-3020NT	LJE55M-3020DK	LJE55M-3020DH	LJE55M-3020DC	
LJE55-3025PK	LJE55-3025PH	LJE55-3025PT	LJE55-3025NK	LJE55-3025NH
LJE55-3025NT	LJE55-3025DK	LJE55-3025DH	LJE55-3025DC	

90...250VAC	300mA	15Hz	<6.5V	≤1.6mA
LJE55M-2420GK	LJE55M-2420GH	LJE55M-4020GK	LJE55M-4020GH	
LJE55M-2425GK	LJE55M-2425GH	LJE55M-4025GK	LJE55M-4025GH	

检测距离(Sn)的5%	约为回差(H)的10%	-	-	Yes	-25℃...70℃	80×80×1t	ABS工程塑料	IP66
-------------	-------------	---	---	-----	------------	----------	---------	------

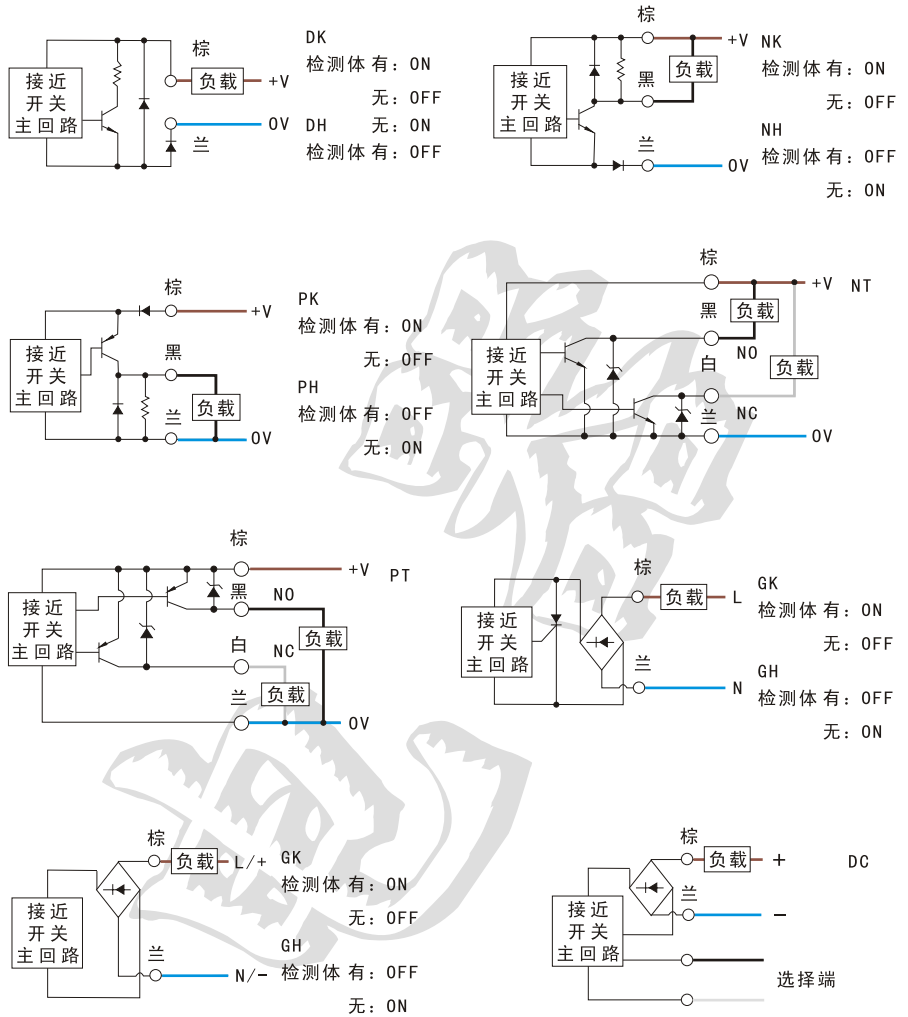

对波浪的防护



对任何方向的水直
接强喷水也不受
水浸。

IP66