

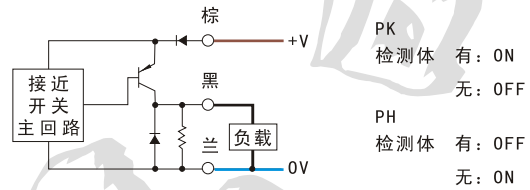
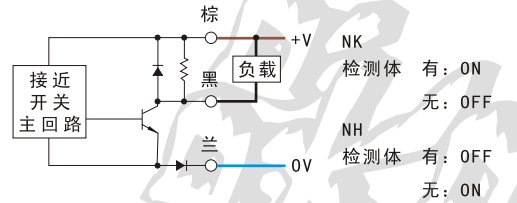


额定感应距离/ 实际工作距离		埋入式
		非埋入式
单位:mm		

10mm/8mm
15mm/12mm

E35 Φ35×17

10...30VDC
50mA/200mA
100Hz/200Hz
6V/1.5V
<0.4mA/0.05mA
LJE35M-3010PK
LJE35M-3010PH
LJE35M-3010NK
LJE35M-3010NH
LJE35M-3010DK
LJE35M-3010DH
LJE35-3015PK
LJE35-3015PH
LJE35-3015NK
LJE35-3015NH
LJE35-3015DK
LJE35-3015DH
检测距离(Sn)的5%
约为回差(H)的10%
-
-
Yes
-25℃...70℃
50×50×1t
ABS工程塑料
IP66

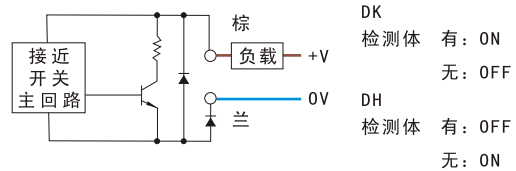

对波浪的防护



对任何方向的水直
接强喷水流也不受
水浸。

IP66