


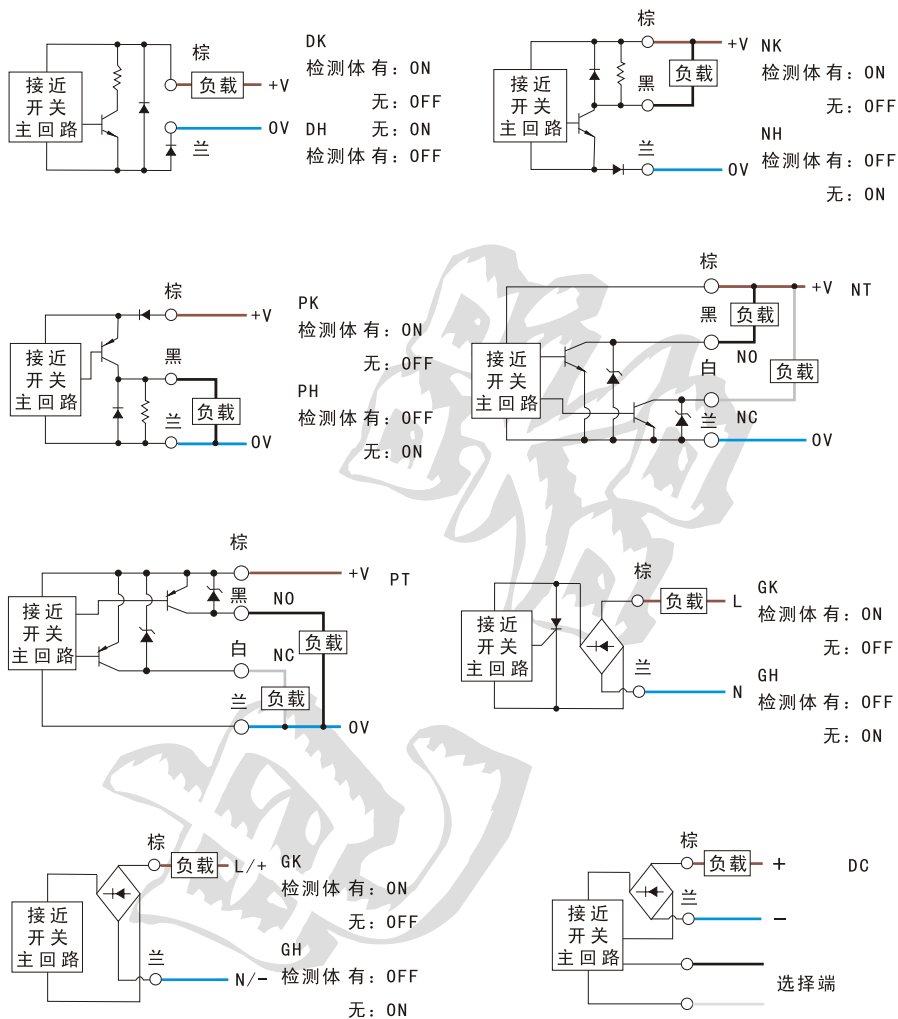


额定感应距离/ 实际工作距离		埋入式
		非埋入式
单位:mm		

15mm/12mm
20mm/16mm

G41-A □40×118

10...30VDC
50mA/200mA
50Hz/100Hz
6V/1.5V
<0.4mA/0.05mA
LJG41M-3015PK-A
LJG41M-3015PH-A
LJG41M-3015PT-A
LJG41M-3015NK-A
LJG41M-3015NH-A
LJG41M-3015NT-A
LJG41M-3015DK-A
LJG41M-3015DH-A
LJG41M-3015DC-A
LJG41-3020PK-A
LJG41-3020PH-A
LJG41-3020PT-A
LJG41-3020NK-A
LJG41-3020NH-A
LJG41-3020NT-A
LJG41-3020DK-A
LJG41-3020DH-A
LJG41-3020DC-A
90...250VAC
300mA
20Hz
<6.5V
≤1.6mA
LJG41M-2415GK-A
LJG41M-2415GH-A
LJG41M-4015GK-A
LJG41M-4015GH-A
LJG41-2420GK-A
LJG41-2420GH-A
LJG41-4020GK-A
LJG41-4020GH-A
检测距离(Sn)的5%
约为回差(H)的10%
-
-
Yes
-25℃...70℃
80×80×1t
ABS工程塑料
IP65



对喷水防水护



对任何方向的水直
接强喷水流也不受
水浸。

IP65