




额定感应距离/ 实际工作距离		埋入式 非埋入式
单位:mm		

10mm/8mm 15mm/12mm

H28 Φ30×75

10...30VDC 50mA/200mA 100Hz/200Hz 6V/1.5V <0.4mA/0.05mA
LJH28M-3010PK
LJH28M-3010PH
LJH28M-3010PT
LJH28M-3010NK
LJH28M-3010NH
LJH28M-3010NT
LJH28M-3010DK
LJH28M-3010DH
LJH28M-3010DC
90...250VAC 300mA 25Hz <6.5V ≤1.6mA
LJH28M-2410GK
LJH28M-2410GH
LJH28M-4010GK
LJH28M-4010GH
LJH28-2415GK
LJH28-2415GH
LJH28-4015GK
LJH28-4015GH
检测距离(Sn)的5% 约为回差(H)的10% >20MΩ(DC500V) DC1500V/AC2000V Yes -25℃...70℃ 60×60×1t ABS工程塑料+铜壳 IP66

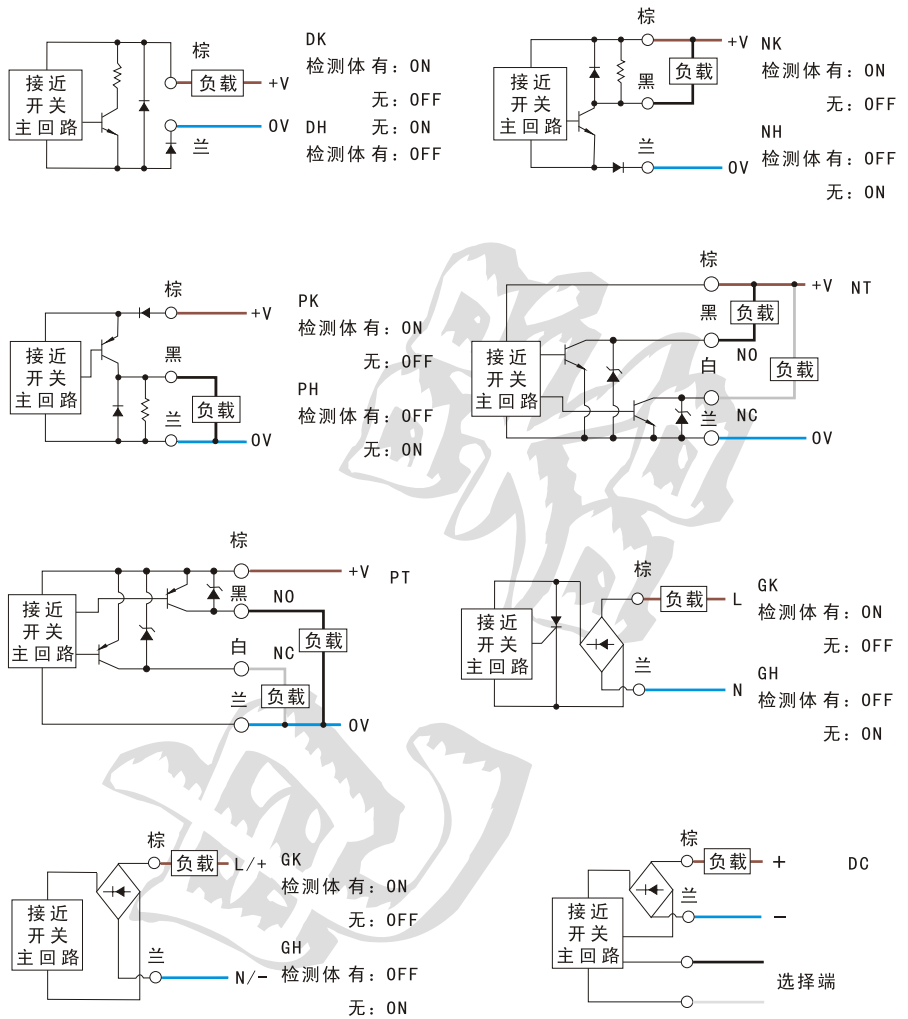

对波浪的防护



对任何方向的水直
接强喷水也不受
水浸。

IP66