





额定感应距离/ 实际工作距离		埋入式
		非埋入式
单位:mm		

7mm/5.6mm
10mm/8mm


H25 25×33×69

10...30VDC
50mA/200mA
100Hz/200Hz
6V/1.5V
<0.4mA/0.05mA
LJH25M-3007PK
LJH25M-3007PH
LJH25M-3007PT
LJH25M-3007NK
LJH25M-3007NH
LJH25M-3007NT
LJH25M-3007DK
LJH25M-3007DH
LJH25-3010PK
LJH25-3010PH
LJH25-3010PT
LJH25-3010NK
LJH25-3010NH
LJH25-3010NT
LJH25-3010DK
LJH25-3010DH
90...250VAC
300mA
25Hz
<6.5V
≤1.6mA
LJH25M-2407GK
LJH25M-2407GH
LJH25M-4007GK
LJH25M-4007GH
LJH25-2410GK
LJH25-2410GH
LJH25-4010GK
LJH25-4010GH
检测距离(Sn)的5%
约为回差(H)的10%
-
-
Yes
-25℃...70℃
50×50×1t
ABS工程塑料
IP65

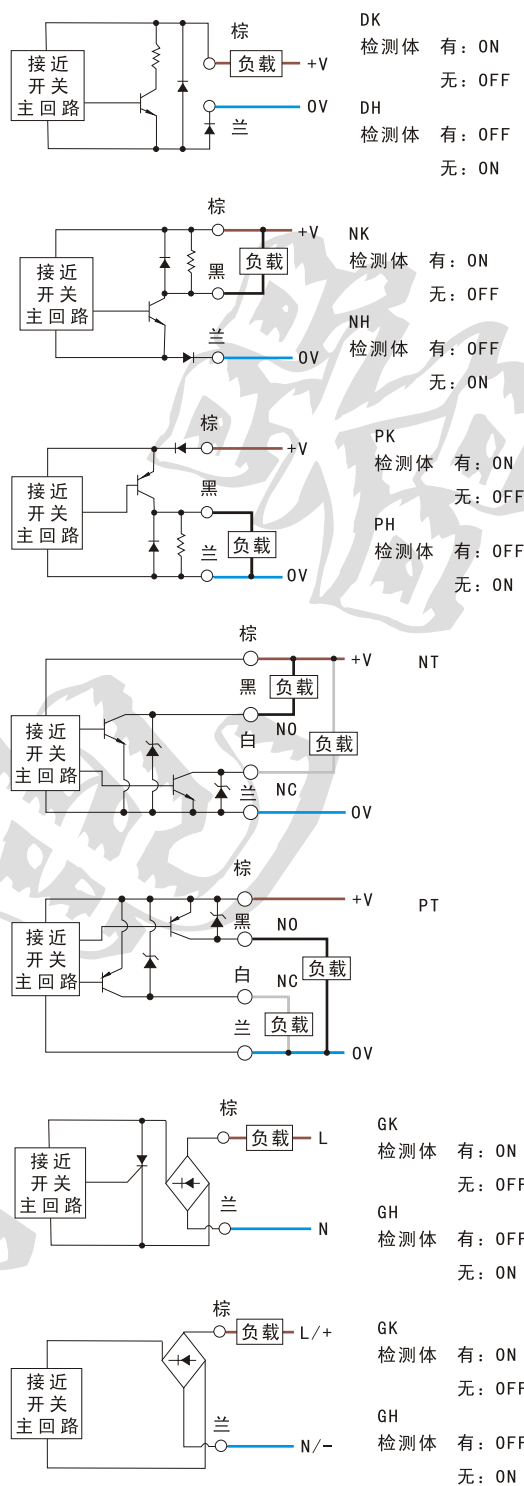

对喷水防水防护



对任何方向的水直接
接强喷水流也不受
水浸。

IP65